




AUTODOOR OPERATOR

FOR ALL TYPES OF DOORS

Auto 100

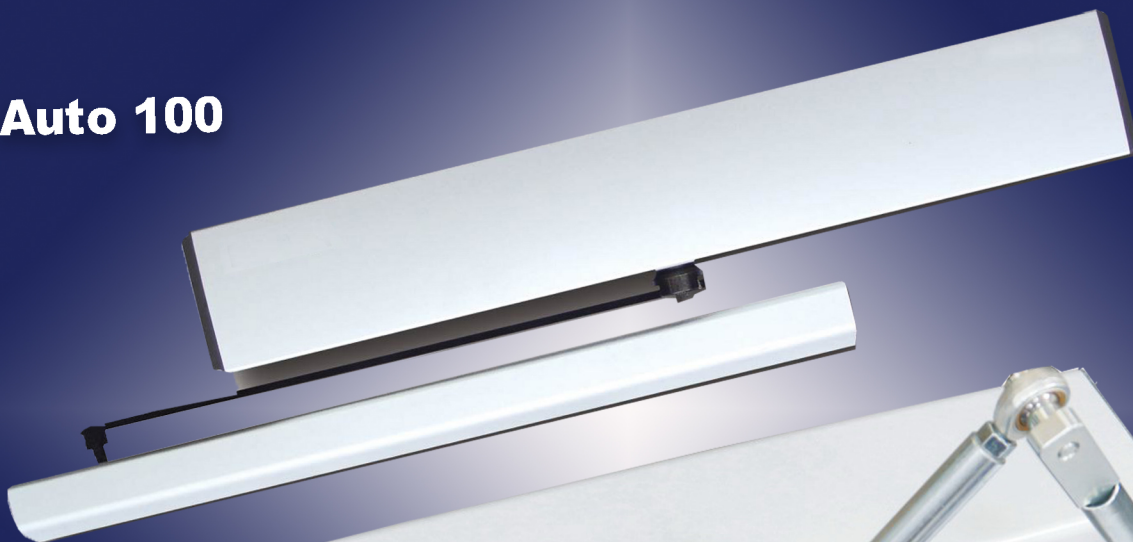

Auto 250









Hospitals, Libraries, Malls, Offices

Specifications of SPRINT™ Autodoor Operators



	Auto 100	Auto 250
Size	L515 x W90x H95 mm	L600 x W135x H120 mm
Weight	6.5kg	14kg
Door Configuration	Single leaf	
Door Weight & Width	Limited Weight: ≤ 100 kgs Door leaf width: ≤ 1200 mm	Limited Weight: ≤ 250 kgs Door leaf width: ≤ 1500 mm
Motor	Brushless DC Motor	
Power Consumption	50W	60W
Voltage	AC 220V±10%, 50-60Hz AC 110V±10%, 50-60Hz	
Swinging Noise	55 decibels (max.)	
Opening time	3-7s (adjustable)	3-8s (adjustable)
Hold-open time	1-30s (adjustable)	0-120s (adjustable)
Transmission Important Condition	Outward Arm assembly / Inward Arm assembly	
Opening Door Range	120 Max / 90 (default)	

Every set of operator can use the Inward / Outward Arm assembly.

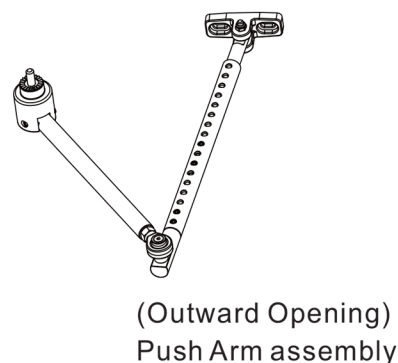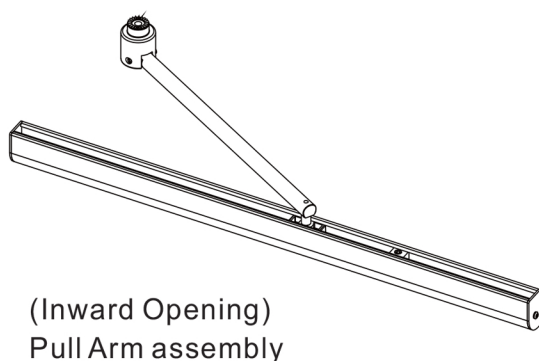

Product specifications and design are subject to continual improvement and may be upgraded without notice.